

CREATING PACKAGES COMMON.EXE


Get the sources :

Download the .EXE source for your software from the publisher's website.

To develop your packages, it is preferable to have WAPTDEV on your management machine.

Generate the package template :


Get the template for your package from the downloaded source.

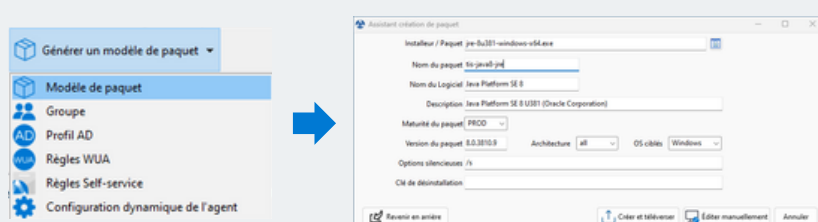

Edit the package :

Validate the UAC if necessary to open the IDE (PyScripter/VSCode).

Run the installation in DEV mode (in the IDE).

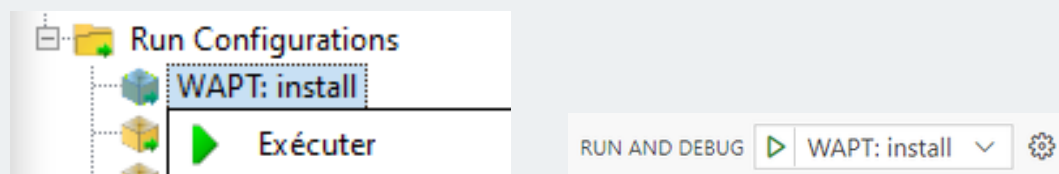

Retrieve the software key:

Use the command 'wapt-get list-registry' followed by the name of the freshly installed software and add the key in the 'key' field of 'install_exe_if_needed'.

Confirm installation :

Confirm that the installation has been detected using the key by restarting the installation.

In the 'Private repository' tab, click on 'Build and import a package into the repository'.

Then select the folder where the package has just been developed.

